SAMSUNG
ELECTRONICS

Customer :   **DATE : 23.Jan.2007**

SAMSUNG TFT-LCD

MODEL : LTA520HA02

Any Modification of Specification is not allowed without SEC's Permission.

NOTE :

APPROVAED BY	DATE	PREPARED BY	DATE
Kyunghoon Ko	23.Jan.2007	*Jeong-Geun Han*	23.Jan.2007

Product Planning Group3, LCD Business

Samsung Electronics Co., LTD.

Contents

* Revision History

Date	Rev. No	Page	Summary
Jan 23, 2007	000	all	First issued

General Description

Description

LTA520HA02 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 52.0" is 1920 x 1080 and this model can display up to 1.07 billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV, Display terminals for AV application products, and High Definition TV (HDTV).

Features

- RoHS compliance (Pb-free)
- High contrast ratio, high aperture ratio, fast response time
- SPVA(Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm$ 178°)
- High speed response
- Wide UXGA (1920 x 1080 pixels) resolution (16:9)
- Low Power consumption
- Direct Type 24 CCFTs(Cold Cathode Fluorescent Tube)
- DE(Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (2pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	$1226.0(H_{TYP})$ x $719.2(V_{TYP})$	mm	$\pm$ 1.0mm
	$58.5(D_{MAX})$		
Weight	21,000(Max.)	g	
Pixel Pitch	0.6(H) x 0.2(W)*3	mm	
Active Display Area	1152.0(H) x 648.0(V)	mm	
Surface Treatment	Haze 44% , Hard-coating (3H)		
Display Colors	10 bit – 1.07B	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	500 (Typ.)	cd/	

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	GND-1	*13.0*	V	(1)
Storage temperature		T_{STG}	-20	60		(2)
Glass surface temperature (Operation)	Center	T_{OPR}	0	50		(2),(5)
	T. Uniformity	T	-	10		
Shock (non - operating)		S_{nop}	-	30	G	(3)
Vibration (non - operating)		V_{nop}	-	1.5	G	(4)

Note (1) Ta= 25 ± 2 °C
    (2) Temperature and relative humidity range are shown in the figure below.
       a. 90 % RH Max. (Ta   39 °C)
       b. Relative Humidity is 90% or less. (Ta > 39 °C)
       c. No condensation
    (3) 11ms, sine wave, one time for ± X, ± Y, ± Z axis
    (4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

Fig. Temperature and Relative humidity range

MODEL	LTA520HA02	Doc. No	05- 000- G- 070123	Page	5 / 28

(5) Definition of test point

5mm

5mm

① ② ③ ④ ⑤ test points on **LCD Module (Active)**
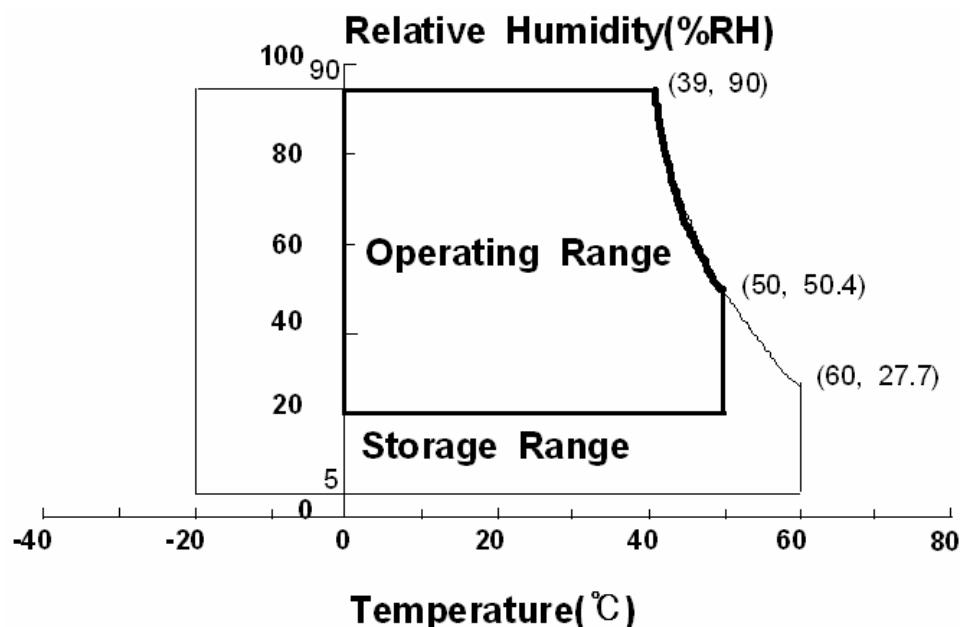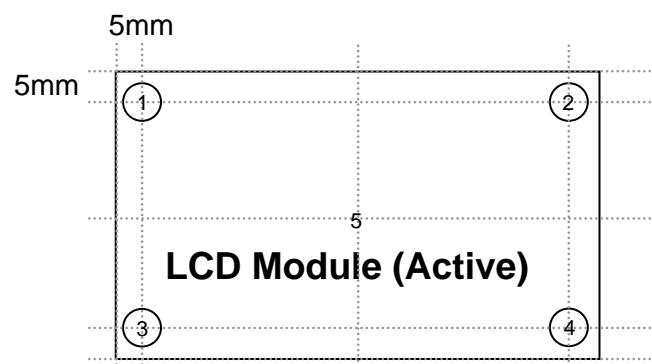
T should be less than *10*   (T = | T_{OPR} − T_{MAX}|)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)
T1~ T4 : Temperature of each edge of the glass surface
T_{MAX} : The highest temperature of the glass surface

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.
Measuring equipment : TOPCON BM-5A, SR-3, RD80s, Eldim EZ-Contrast

(Ta = 25 ± 2°C, VDD=12.0V, fv= 60Hz, f_{DCLK}=74.25MHz, Dim = Max Dim)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		1200	2000	-		(3) SR-3
Response Time	Rising	Tr		-	10	18	msec	(5) RD80s
	Falling	Tf		-	6	8		
	G-to-G	Tg		-	8	-		
Luminance of White (Center of screen)		Y_L	Normal θL,R=0 θU,D=0 Viewing Angle	400	500	-	cd/m²	(6) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.667	TYP. +0.03		(7),(8) SR-3
		Ry			0.315			
	Green	Gx			0.200			
		Gy			0.650			
	Blue	Bx			0.142			
		By			0.080			
	White	Wx			.0282			
		Wy			0.284			
Color Gamut		-		-	90	-	%	(7) SR-3
Color Temperature		-		-	10000	-	K	(7) SR-3
Viewing Angle	Hor.	$θ_L$	C/R 10	75	89	-	Degree	(8) EZ-Contrast
		$θ_R$		75	89	-		
	Ver.	$θ_U$		75	89	-		
		$θ_D$		75	89	-		
Brightness Uniformity (9 Points)		B_{uni}		-	-	25	%	(4) BM-5A

Note (1) Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between
40min and 60min after lighting the back light at the given temperature for stabilization
of the back light. This should be measured in the center of screen.

Dimming Condition : Max Dimming
Environment condition : Ta = 25 ± 2 °C

Photo detector	Field
SR-3	2°
RD80s	2°

Photo detector

Field

SR-3 : 50
RD80s : 50

TFT - LCD Module

LCD Panel

The center of the screen

Note (2) Definition of test point

320   960   1600

180

540

900

Active Area
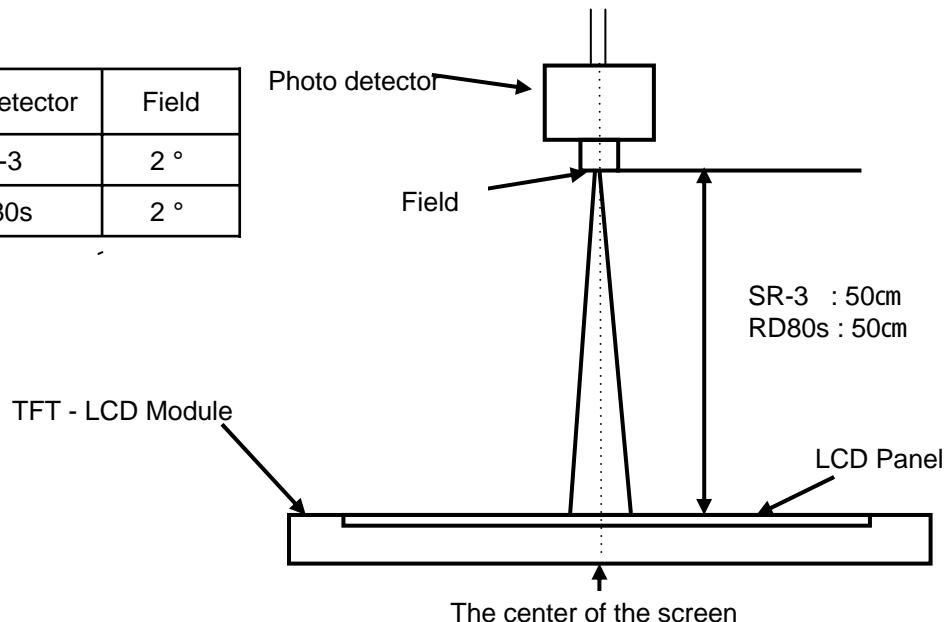
◯ Test Point
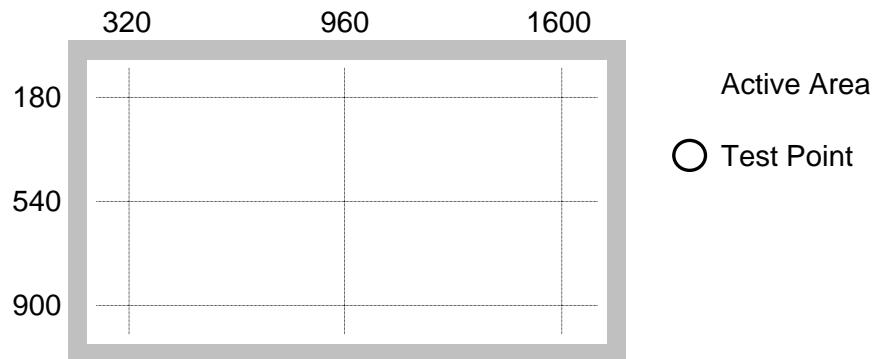
Note (3) Definition of Contrast Ratio (C/R)
: Ratio of gray max (Gmax) & gray min (Gmin) at the center point   of the panel

$$C/R = \frac{G\max}{G\min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black

Note (4) Definition of 9 points brightness uniformity

$$Buni = 100 * \frac{(B\max - B\min)}{B\max}$$

Bmax : Maximum brightness
Bmin : Minimum brightness

Note (5) Definition of Response time : Sum of Tr, Tf

Display data	Black (data off)	White (data on)	White (data off)

Optical Instruments Response

100%
90%
10%
0%

T_R T_F

TIME
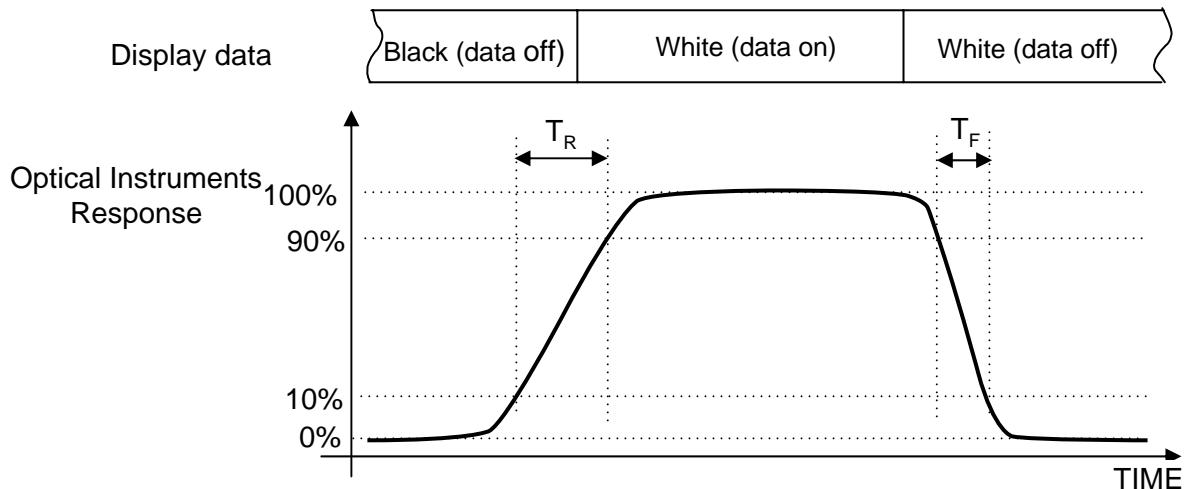
Note (6) Definition of Luminance of White : Luminance of white at center point

Note (7) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point

Note (8) Definition of Viewing Angle
: Viewing angle range (C/R   10)

Θ_U

Θ_R

Θ_L

Θ_D
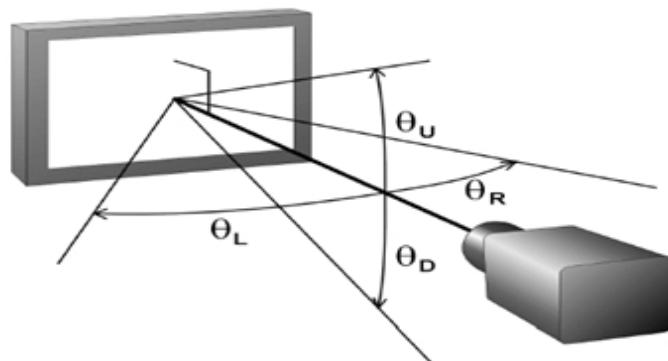
3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

Ta = 25°C ± 2 °C

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	11	12	13	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	1000	-	mA	(2),(3)
	(b) White		-	1300	-	mA	
	(c) N-Pattern		-	1200	1400	mA	
Vsync Frequency		f_V	48.0	60.0	62.0	Hz	
Hsync Frequency		f_H	60.0	67.5	75.0	kHz	
Main Frequency		f_{DCLK}	65	74.25	77.5	MHz	(4)
Rush Current		I_{RUSH}	-	-	5	A	(5)

Note (1) The ripple voltage should be controlled under 10% of V_{DD}.
    (2) fv=60Hz, fDCLK = 74.25MHz, V_{DD} = 12.0V, DC Current.
    (3) Power dissipation check pattern (LCD Module only)
    (4) For each LVDS channel

a) Black Pattern   b) White Pattern   c) N-Pattern
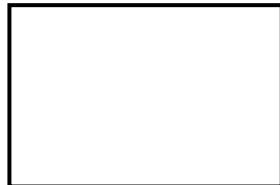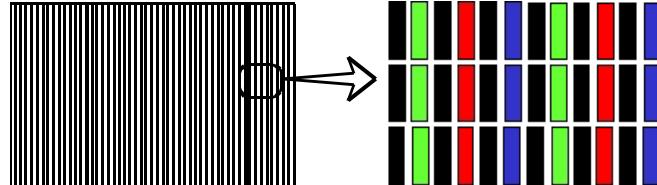
(5) Measurement Conditions
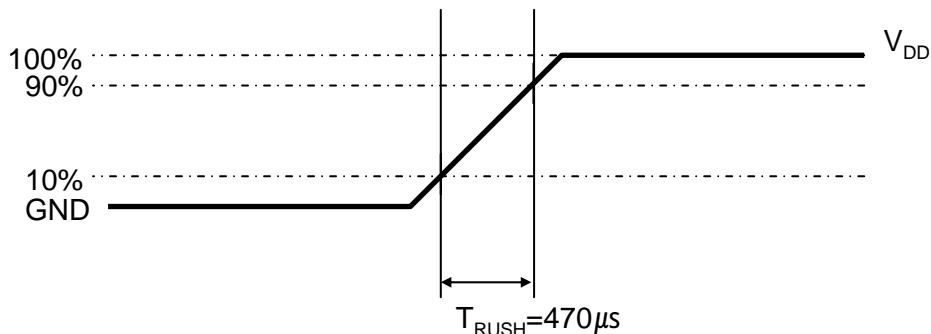
Rush Current I_{RUSH} can be measured when T_{RUSH}. is 470 .

MODEL	LTA520HA02	Doc. No	05-000-G-070123	Page	10 / 28

3.2 Back Light Unit

The back light unit contains 24 direct-lighting type CCFTs (Cold Cathode Fluorescent Tube). The characteristics of lamps are shown in the following tables.

Ta=25 ± 2°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Current	I_L	4.0	6.0	7.0	mArms	
Lamp Voltage	V_L	-	1620	-	Vrms	
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25± 2   , For single lamp only.]
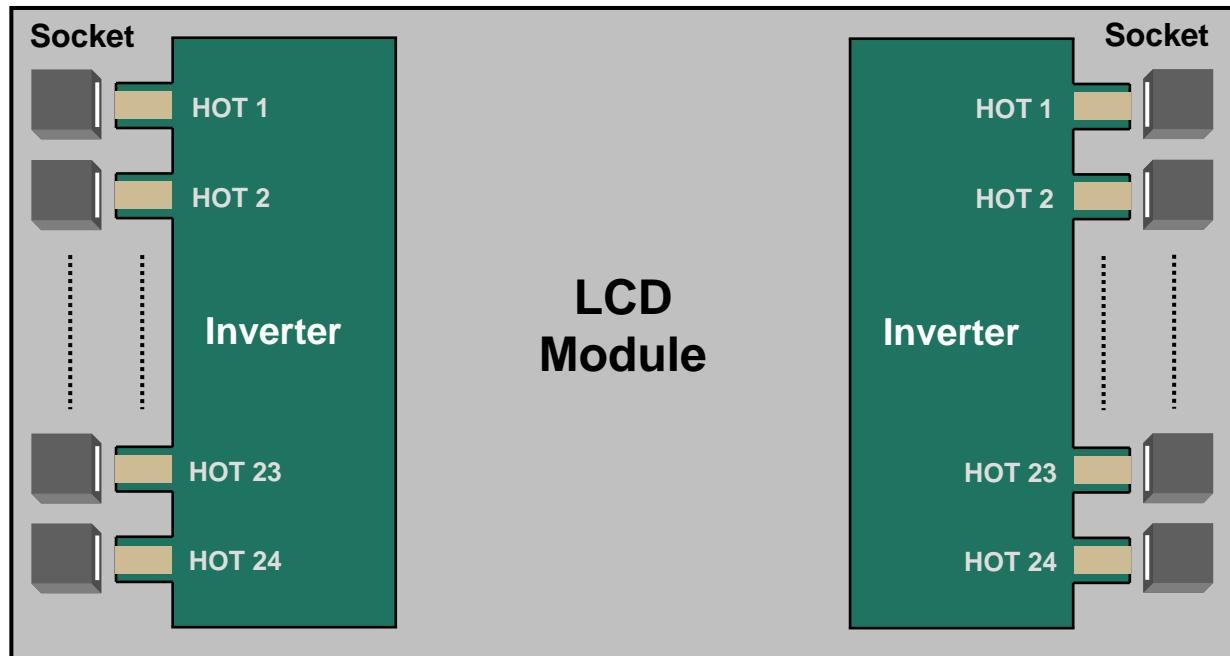
3.3 Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	Vin	-	23	24	25	V	Ta=25±2 ℃
Input Current	I_{RUSH}	Vin=24.0V Vdim=3.3V	-	-	15	A	Initial Turn-on
Lamp Current	I_O	Vdim=3.3 V	5.5	6.0	6.5	mArms	-
Frequency	F_{LAMP}	Vin=24.0 V	46.0	48.5	51.0	kHz	-
Backlight On/Off	ON	Vin=24.0 V	2.4	-	5.25	V	-
	OFF	Vin=24.0 V	-0.3	-	0.8		
Dimming Control	V_{DIM}	Max Lum	-	-	3.3	V	-
		Min. Lum	0.0	-	-		

4. Block Diagram

CONTROL PCB

- USER CONNECTOR
- TIMING CONTROLLER
- SSC
- DC/DC STEP DOWN
- MEMORY(DCC)
- DC/DC CONVERTOR (AV$_{DD}$/V$_{DD}$/V$_{ON}$/V$_{OFF}$)
- GAMMA-GENERATOR
- V$_{COM}$ GENERATOR R-STRING + FB

Legend:
- DATA
- CONTROL
- V$_{IN}$(12.0V)
- AV$_{DD}$
- V$_{ON}$/V$_{OFF}$
- V$_{COM}$
- Y VOLTAGE
- V$_{DD}$(3.3V)
- V$_{DD}$(2.5V)

- FPC
- SOURCE PCB
- DATA DRIVER IC
- GATE DRIVER IC

LTA52OHA PANEL
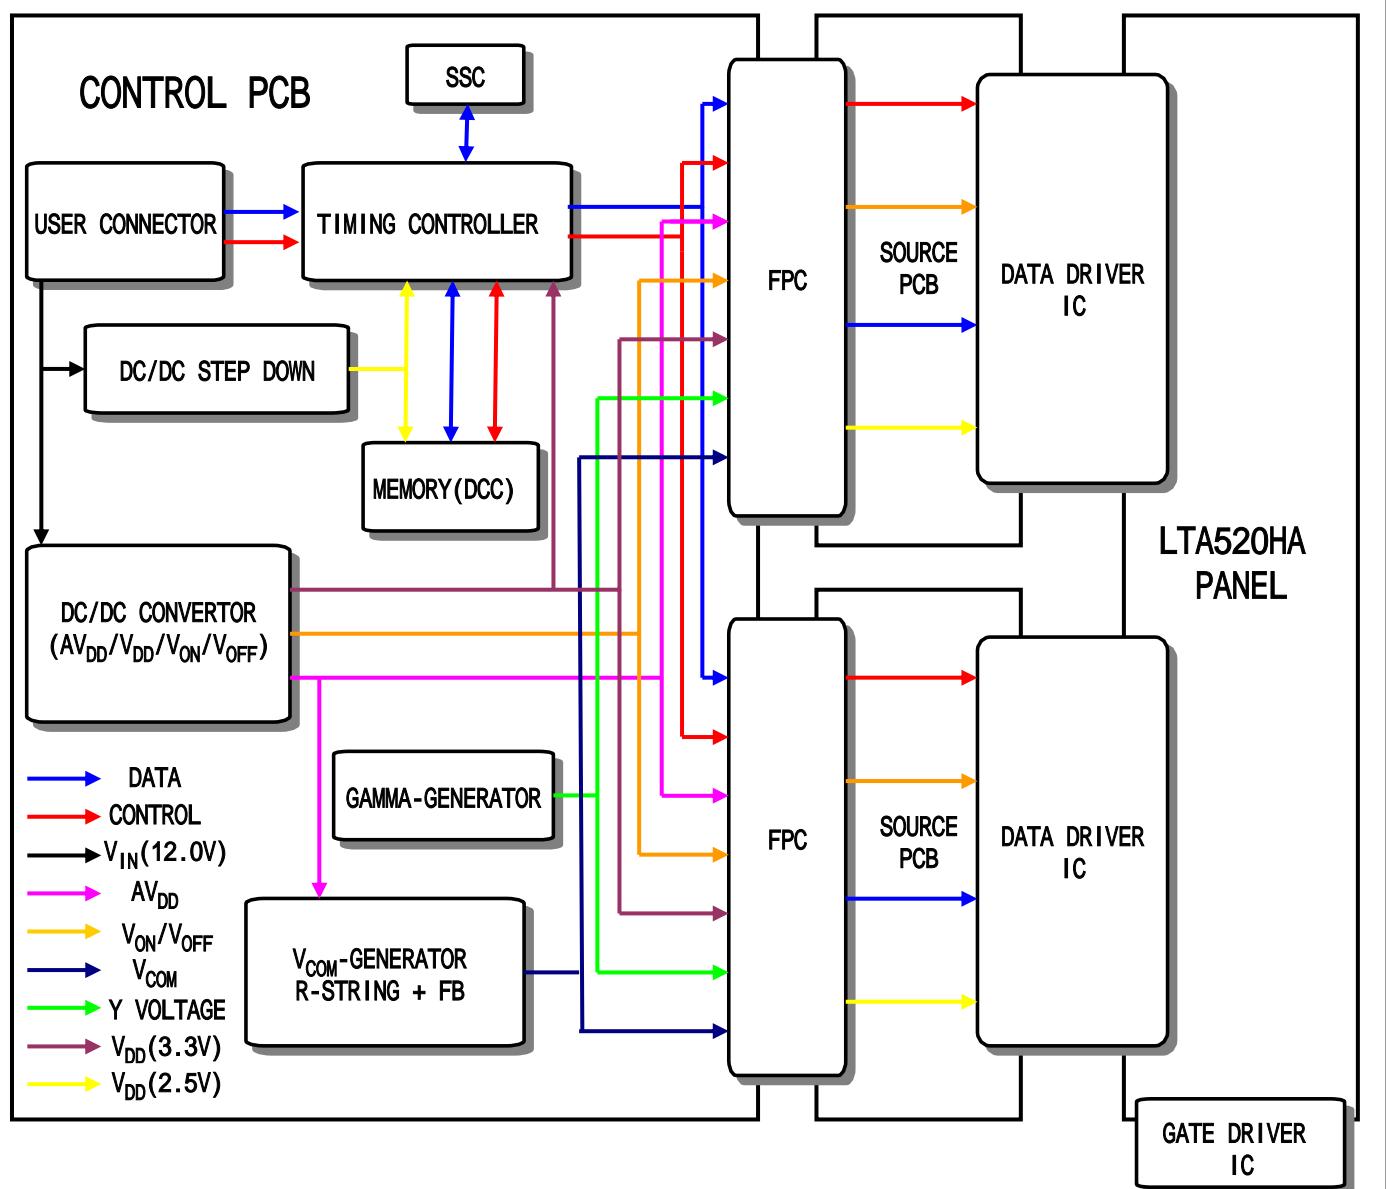
5. Input Terminal Pin Assignment

5.1. Input Signal & Power   Connector : FI-RE51S-HF (JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	Power	DC 12V	26	RE[0]P	Even LVDS Signal +
2	Power	DC 12V	27	RE[1]P	Even LVDS Signal -
3	Power	DC 12V	28	RE[1]P	Even LVDS Signal +
4	Power	DC 12V	29	RE[2]P	Even LVDS Signal -
5	Power	DC 12V	30	RE[2]P	Even LVDS Signal +
6	GND	GND	31	GND	GND
7	GND	GND	32	ROCLK-	Even LVDS Signal -
8	GND	GND	33	ROCLK+	Even LVDS Signal +
9	GND	GND	34	GND	GND
10	RO[0]N	Odd LVDS Signal -	35	RO[3]N	Even LVDS Signal -
11	RO[0]P	Odd LVDS Signal +	36	RO[3]P	Even LVDS Signal +
12	RO[1]N	Odd LVDS Signal -	37	RO[4]N	Even LVDS Signal -
13	RO[1]P	Odd LVDS Signal +	38	RO[4]P	Even LVDS Signal +
14	RO[2]N	Odd LVDS Signal -	39	GND	GND
15	RO[2]P	Odd LVDS Signal +	40	NC	NC
16	GND	GND	41	NC	NC
17	ROCLK-	Odd LVDS Signal -	42	NC	NC
18	ROCLK+	Odd LVDS Signal +	43	NC	NC
19	GND	GND	44	NC	NC
20	RO[3]N	Odd LVDS Signal -	45	NC	NC
21	RO[3]P	Odd LVDS Signal +	46	NC	NC
22	RO[4]N	Odd LVDS Signal -	47	NC	NC
23	RO[4]P	Odd LVDS Signal +	48	NC	NC
24	GND	GND	49	NC	NC
25	RE[0]N	Even LVDS Signal -	50	NC	NC
			51	NC	NC

Note(1) Pin number starts from Right side

Pin No. 1   Pin No. 51

connect name
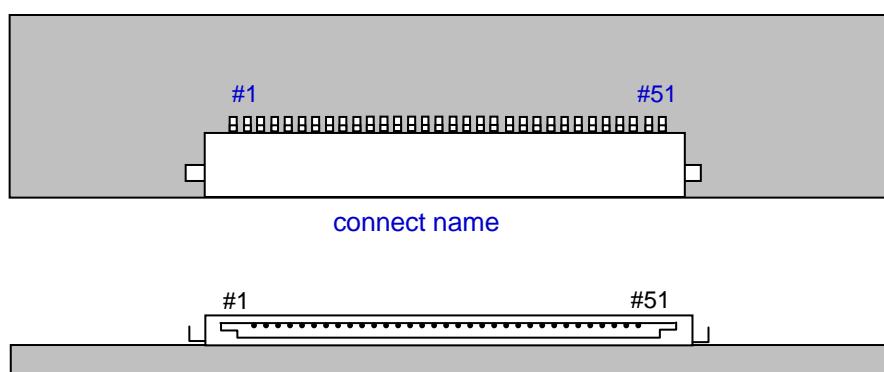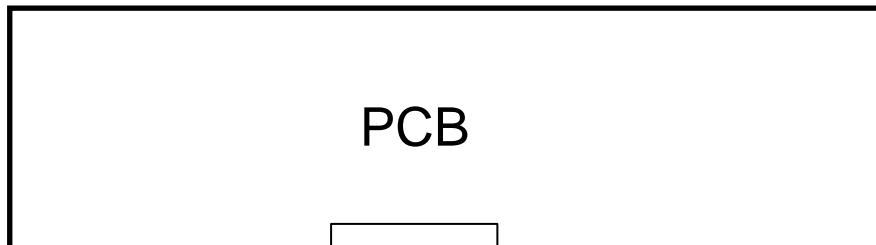
Fig. Connector diagram

a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
b. All power input pins should be connected together.
c. All NC pins should be separated from other signal or power.

5.2. Inverter Input Pin Configuration

Connector : S14B-PHA-SM-TB(LF) (JST)

Pin No.	Pin Configuration(FUNCTION)
1	24 V
2	24 V
3	24 V
4	24 V
5	24 V
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection * ERROR DETECTION (NORMAL : GND / ABNORMAL : 5V)
12	Backlight On /Off [ON:2.4 - 5.25 V, OFF: -0.3 - 0.8 V]
13	Dimming Control [0V:Min, 3.3V:Max]
14	No Connection

5.3. Inverter Input Power Sequence

Vin (24V)
20msec [Min]
0.9 Vin
0.1 Vin
1.1sec [Min]

Dimming Control
(0 ~ 3.3 V)
0.5sec [Min]
0.5sec [Min]

Back Light On/Off
2.4 V
0.5sec [Min]
0.1sec [Min]
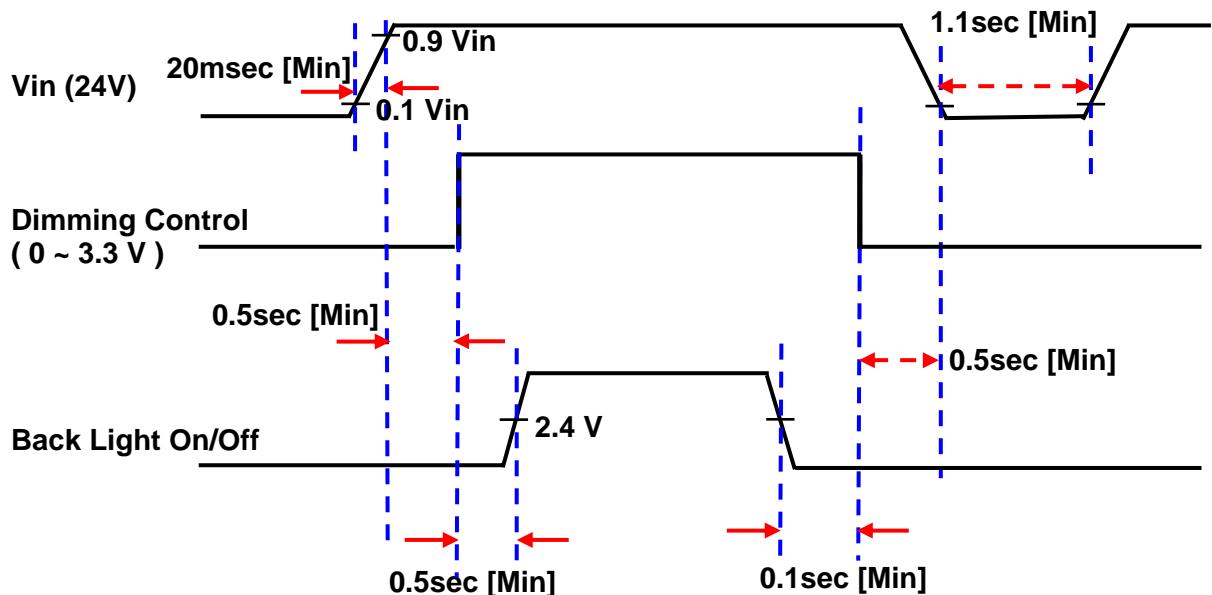
5.3 LVDS Interface
   - LVDS Receiver : Tcon (merged)
   - Data Format (JEIDA)

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0
	TxIN/RxOUT29	R1
	TxIN/RxOUT30	G0
	TxIN/RxOUT31	G1
	TxIN/RxOUT32	B0
	TxIN/RxOUT33	B1
	TxIN/RxOUT34	RESERVED

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	RED										GREEN										BLUE										GRAY SCALE LEVEL
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6	B7	B8	B9	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	DARK	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	LIGHT	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021
		0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	DARK	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	LIGHT	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1021
		0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1022
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1023
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	DARK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	B1021
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B1022
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1023

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

6. Interface Timing

6.1 Timing Parameters （DE only mode）

| SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	65.0	74.25	77.5	MHz	(1)
Hsync		F_H	60.0	67.5	75.0	KHz	-
Vsync		F_V	48.0	60.0	62.0	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	lines	-
	Vertical Total	T_{VB}	1100	1125	1480	lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	clocks	-
	Horizontal Total	T_H	2150	2300	2450	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does
not have an effect on normal operation.
(1) For each LVDS channel
(2) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
(3) Internal V_{DD} = 3.3V

## 6.2 Timing diagrams of interface signal (DE only mode)
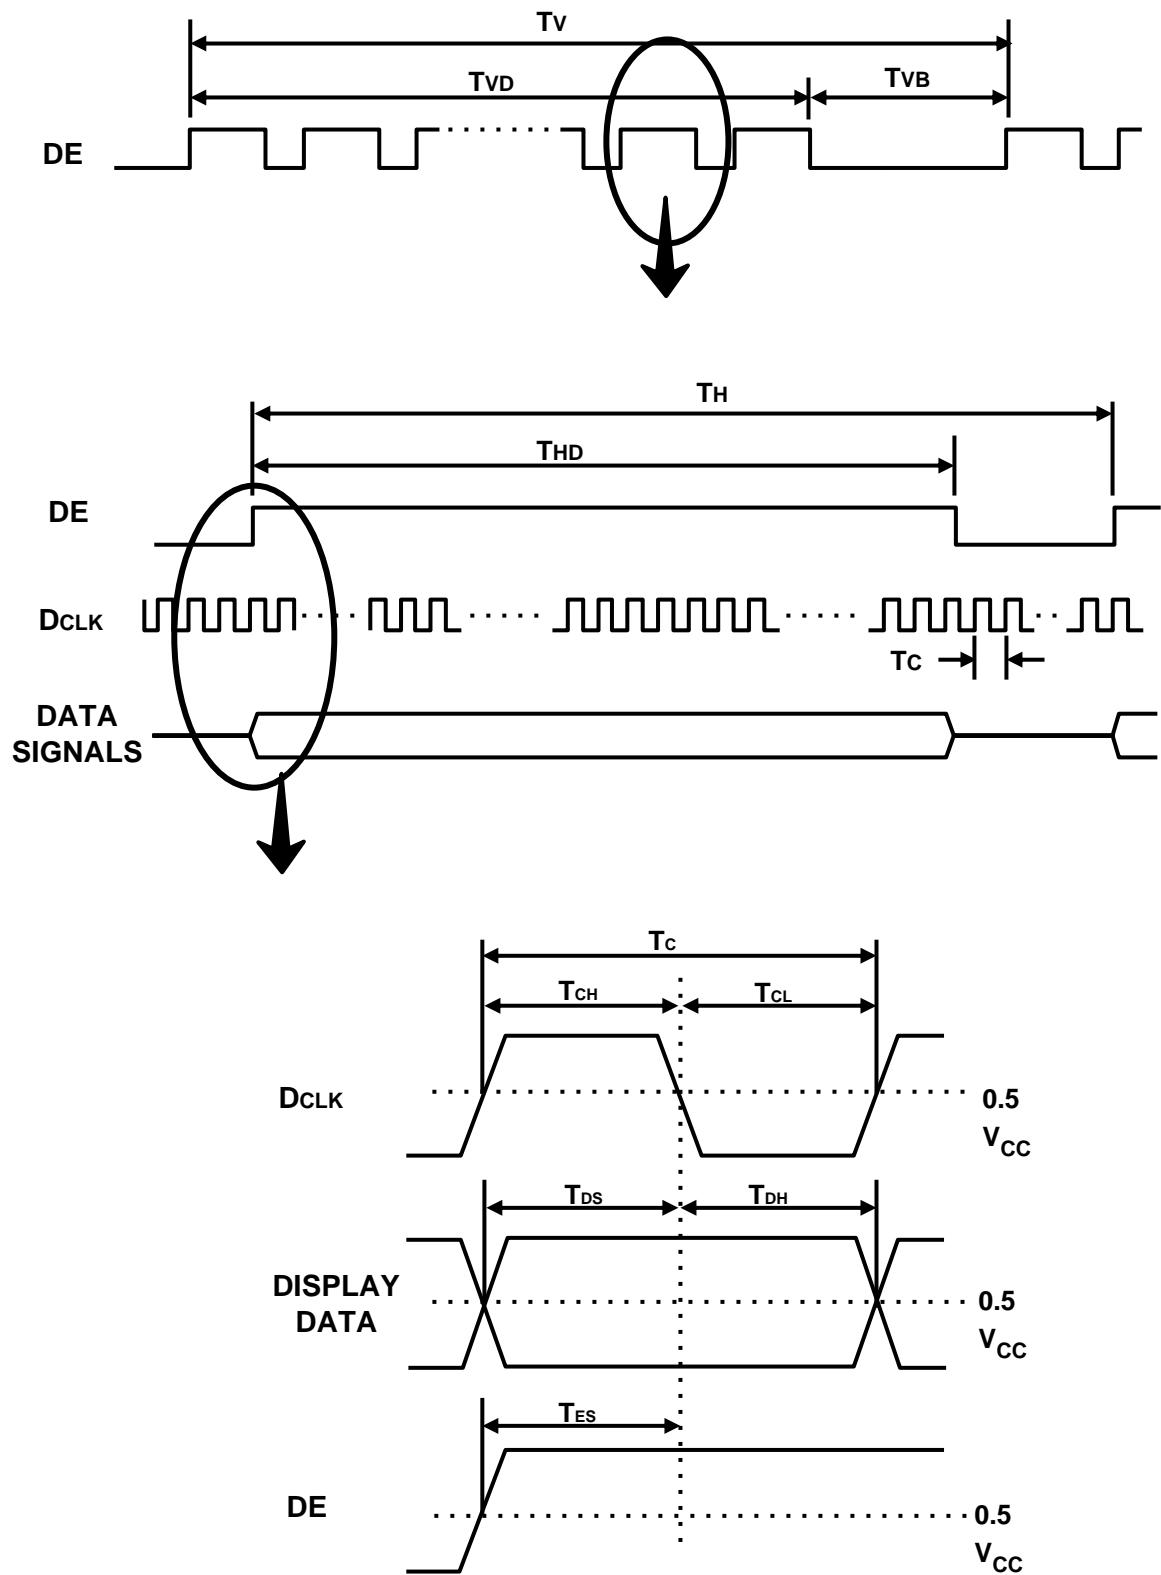
6.3 Power ON/OFF Sequence

   To prevent a latch-up or DC operation of the LCD Module, the power on/off
sequence should be as the diagram below.

0<T1   10msec
0<T2   50msec
0<T3   50msec
1000msec   T4

1000msec   T5
(Recommend Value)
100msec   T6
(Recommend Value)
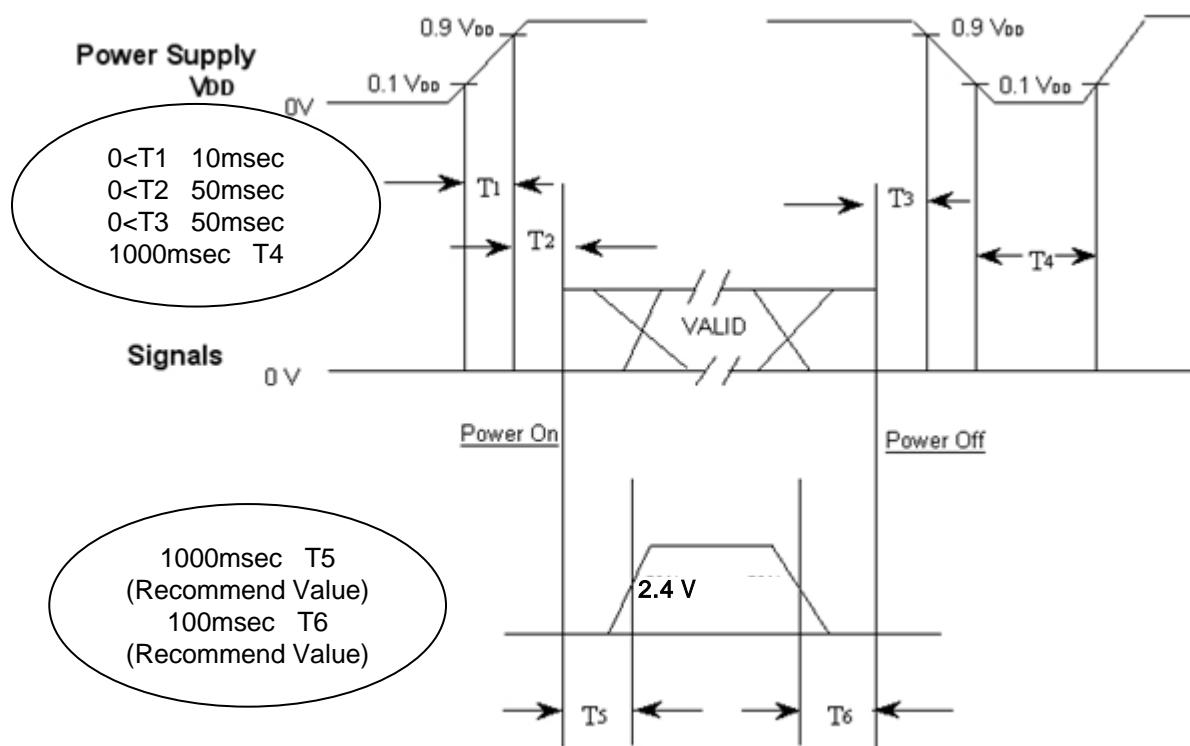
T1 : V_{DD} rising time from 10% to 90%
T2 : The time from V_{DD} to valid data at power ON.
T3 : The time from valid data off to V_{DD} off at power Off.
T4 : V_{DD} off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

▪ The supply voltage of the external system for the Module input should be the same
  as the definition of V_{DD}.
▪ Apply the lamp voltage within the LCD operation range. When the back light turns on
  before the LCD operation or the LCD turns off before the back light turns off,
  the display may momentarily show abnormal screen.
▪ In case of V_{DD} = off level,
  please keep the level of input signals low or keep a high impedance.
▪ T4 should be measured after the Module has been fully discharged between power off
  and on period.
▪ Interface signal should not be kept at high impedance when the power is on.

FILE NO.

NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	WEIGHT FINISH MATERIAL	UNFOLDED DIM. OF. MATERIAL	REMARK
	OUTLINE DIMENSION		52" FMB				

5-M4, dp=9Max
(User Hole)

(28.6)

Max 1.5(Gap)

2.5 ±1

40 ±1

Section:A-A'(S:3/1)

5-29 ±0.5

430 ±0.5   430 ±0.5

1226±1 (Out Line)

(40)   (40)

A'

A

4-M4, dp=9, Max   29 ±0.5
2-ø10 Hole

4-M4, dp=9, Max
2-ø10 Hole

Active Center

235 ±0.5

95 ±0.5

95 ±0.5

235 ±0.5

400 ±0.5

235 ±0.5

95 ±0.5

95 ±0.5

235 ±0.5

400 ±0.5

648(Active Area)

662±0.8 (Bezel Opening)

719.2±1 (Out Line)

1152(Active Area)

1166±0.8 (Bezel Opening)

5-29 ±0.5

430 ±0.5   430 ±0.5

135 ±1   135 ±1

5-M4, dp=9Max
(User Hole)

57.5 ±1

52.5 ±1

14-26 ±0.5

128.65 ±1

28-ø3 Hole

* NOTES
1. BACKLIGHT : 28 COLD CATHODE FLUORESCENT LAMPS.
2. I/F CONNECTOR SPECIFICATION.(51PIN)
   - MAKER : JAE
   - PART NO. : FI-RE51S-HF
3. BALANCE BOARD CONNECTOR SPECIFICATION.
   - IP: 7PIN,2EA,SM02-BG4S-S(LF),JST
   - Board to Board; TBD
   - IP F/B: 7PIN,1EA,BM07B-GHS(LF)(9N)<TBD>
4. LAMP SOCKET(OR WIRE) SPEC.
   TBD
5. USER HOLE: ALLOWED DEPTH OF USERHOLE SCREW INSERTION IS 9.0mm MAX.
6. WEIGHT : Max TBD
7. BLACK MATRIX SPEC
   - |A - B| ≤ 2.0 mm
   - |C - D| ≤ 2.0 mm

BLACK MATRIX

8. CHASSIS TOP & POL GAP SPEC : MAX1.5mm, MAX-MIN=0.7mm

PREMINARY

REVISION

GENERAL TOLERANCE				REV	DATE	DESCRIPTION OF REVISION				REASON	CHG'D BY
STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	mm	DRA'N BY	DES'D BY	CHK'D BY	APP'D BY		
0 < X ≤ 4	±0.05	±0.1	±0.2	SCALE	N/S	J.M.CHOI				MODEL NAME	52" FMB
4 < X ≤ 16	±0.08	±0.15	±0.3	TOLERANCE		2006.11.23				PART/SHEET NAME	OUTLINE DIMENSION	SHEET 1/2
16 < X ≤ 64	±0.12	±0.25	±0.5	LEVEL 1		SPEC. NO.					
64 < X ≤ 256	±0.25	±0.4	±0.8	SAMSUNG ELECTRONICS						CODE NO.		VER. 000

7. Outline Dimension (Rear View)

AREA FOR LOCATING SUPPORT LAMP
HEIGHT : MAX 5

AREA FOR LOCATING SUPPORT LAMP
HEIGHT : MAX 5

2-290

2-432.6 (BALANCE/INVERTER PCB)

2-M6 TAP   M4 TAP

2-185

244.55 (CONTROL PCB)

2-691.4 (USER HOLE)

2-230 (USER HOLE)

2-45   2-M6 TAP   2-M4 TAP

2-275

2-M6 TAP   M4 TAP

620 (USER HOLE)

2-1206.2 (USER HOLE)

| | OUTLINE DIMENSION | | 52" FMB | | | | |

GENERAL TOLERANCE

STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.25	±0.4	±0.8

REV	DATE	DESCRIPTION OF REVISION			
UNIT	mm	DRA'N BY	DES'D BY	CHK'D BY	APP'D BY
SCALE	N/S		J.M.CHOI		
TOLERANCE LEVEL 3		2006.11.23			

SAMSUNG ELECTRONICS

SPEC. NO

REASON		CHG'D BY
MODEL NAME	52" FMB	
PART/SHEET NAME	OUTLINE (REAR VIEW)	SHEET 2/2
CODE NO.		VER. 000

PREMINARY

Model	LTA520HA02	Doc. No	05-000-G-070123	Page	23 / 28

8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

**Packing
-Pallet Box**

Cushion-Foam

LCD Module

Cushion-Foam

Pallet-Plastic

→ **Direction be able to open it**

8.2 Packing Specification

Item	Specification	Remark
LCD Packing	9ea / (Packing-Pallet Box)	1. 207Kg / LCD (9ea) 2. 15.6 Kg / Cushion-pallet (2ea) 3. 10.5 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 10kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1475mm(H) x 1150mm(V) x 995mm(height)
Total Pallet Weight	243.1kg	Pallet(10kg) + Module(23*9=207) + Cushion(up+botton=15.6kg) + Pallet-BOX(10.5kg)

9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Parts number : LTA520HA02
(2) Revision: Three letters
(3) Lot number : X X X X XXX XX X

Cell Position No. (In the Glass)
Glass No. (In the one Lot)
Lot No. (Glass)
Month
Year (Note1)
Product code
Line

(4) Nameplate Indication

Week code : 05 29

week
year

40mm

Revision code

Lot number

80mm

(5) Packing box attach

DVC : **LTA520HA02**
TYPE: XXXX
QTY : 10
ZAT53K0003   G1

100mm

Part number

Box serial number

165mm
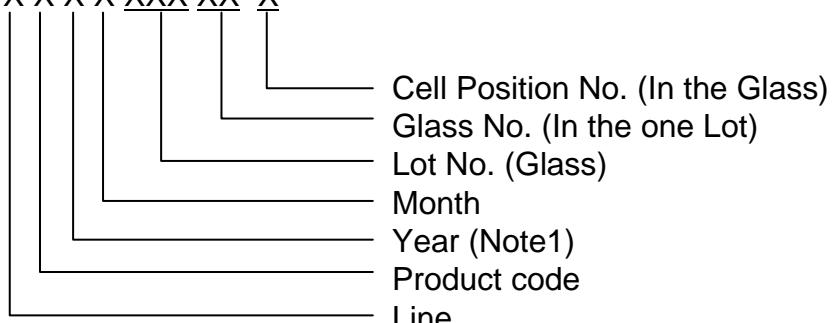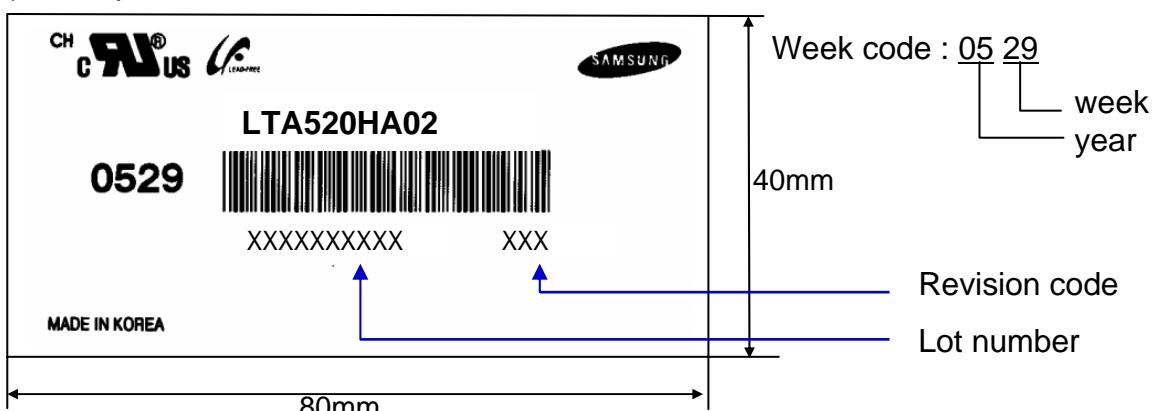
(6) Others
1. After service part
   Lamps cannot be replaced because of the narrow bezel structure.

10. General Precautions

10.1 Handling

(a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.

(b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.

(c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.

(d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.

(e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.

(f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.

(g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.

(i) Protect the Module from static, or the CMOS Gate Array IC would be damaged.

(j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(k) Do not disassemble the Module.

(l) Do not pull or fold the lamp wire.

(m) Do not adjust the variable resistor located on the Module.

(n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized.

(o) Pins of I/F connector should not be touched directly with bare hands.

10.2 Storage

(a) Do not leave the Module in high temperature, and high humidity for a long time.
 It is highly recommended to store the Module with temperature from 0 to 35
 and relative humidity of less than 70%.

(b) Do not store the TFT-LCD Module in direct sunlight.

(c) The Module should be stored in a dark place. It is prohibited to apply sunlight or
 fluorescent light in storing.

10.3 Operation

(a) No Connection or disconnect the Module in the "Power On" condition.

(b) Power supply should always be turned on/off by the "Power on/off sequence"

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic
 interference should be done by system manufacturers. Grounding and shielding methods
 may be important to minimize the interference.

(d) The cable between the back light connector and its inverter power supply should
 be connected directly with a minimized length. A longer cable between
 the back light and the inverter may cause lower luminance of lamp(CCFT) and
 may require higher startup voltage(Vs).

10.4 Operation Condition Guide

(a) The LCD product should be operated under normal conditions.
  Normal condition is defined as below;
    - Temperature : 20 ± 15
    - Humidity : $55\pm 20\%$
    - Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used in extreme conditions such as high temperature,
 humidity, display patterns or operation time etc.., It is strongly recommended
 to contact SEC for Application engineering advice. Otherwise, its reliability and
 function may not be guaranteed. Extreme conditions are commonly found at
 Airports, Transit Stations, Banks, Stock market, and Controlling systems.

10.5 Others

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.

(c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.

(d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.

(e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

(f) Please contact SEC in advance when you display the same pattern for a long time.